

TTGO T-Display 1.14 Inch LCD Control Board ESP32



Produktkode: 801aa

Tilgjengelighet: 2

Lager : S182, S183

Pris: kr. 360,00

Short Description

LILYGO® TTGO T-Display 1.14 Inch LCD Control Board ESP32 Wireless Module
WiFi Bluetooth Low Power Consumption Development Board

Beskrivelse

[Report Item](#)

Statement:

**T-Display has passed "CE" "FCC" "MIC"
"UKCA" certification; LILYGO exclusive; unauthorized use is
prohibited, otherwise legal responsibility will be pursued.**

LILYGO 2022/2/16

T-Display Specifications

MCU: **ESP32** Xtensa dual-core LX6 microprocessor

Wireless Connectivity: **Wi-Fi 802.11 b/g/n, BL V4.2+BLE**

Programming Platform: **Arduino-ide、Micropython**

Serial chip: **CH9102** Version Optional: **Flash: 4M/16M**

Onboard functions: Buttons:IO06+IO07, **battery power** detection

1.14 inch ST7789V IPS LCD:


Resolution: **135 x 240**, High Density 260 ppi

4-Wire SPI interface, Working Power Supply: 3.3V

1.14" diagonal, Full color TFT Display, Drive: **ST7789**

Support USB/Li-Po Battery Dual Power Supply

JST Connect type: **JST GH 1.25mm**





More information?

<https://github.com/Xinyuan-LilyGO/TTGO-T-Display>

LILYGO®



Product Pin Diagram

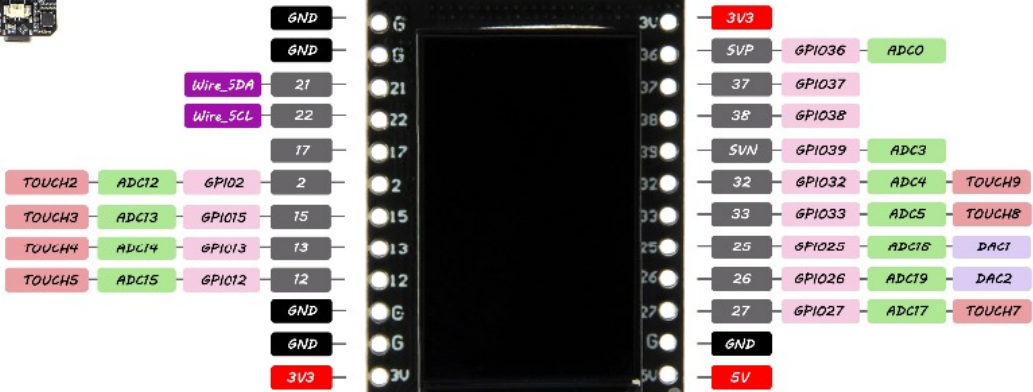

ST7789V

GPIO0 GPIO35

IPS ST7789V 1.14 Inch
ESP32 TTGO T-Display V1.1

	Name		BAT
	GND		ADC
	GPIO		DAC
	I2C		SPI
	Other		Touch

setup

<https://youtu.be/a6XeV66FnXM>