20x4 LCD display



Produktkode: 251aa
Tilgjengelighet: 5
Weight: 20.00g
Custom Field 5 (Location): P46

Pris: kr. 120,00

Kort beskrivelse
Blue (Yellow)-Green-Serial-IIC-I2C-TWI-2004LCD-20X4-Character-LCD-Module-For-Arduino
I2C adapter not included, bestilles her

Beskrivelse

Description:

I2C adapter not included, bestilles her

De brukte enhetene har installert I2C-kontroller. Bakgrunnsfarge ukjent.

2004 20*4 20X4 Character LCD Display Module
Does not include IIC I2C adapter converter module PCF8574
Condition: brand new
Blue/Yellow Green/White backlight
Fully assembled and tested Serial LCD 20x4 Module
Display Format: 20 Characters x 4 lines
Supply voltage: 5V

library
Library for display

I2C adapter not included

SCL kobles til A4, SDA kobles til A5, Vcc til 5v Gnd til 0V

Eksempel på testskisse:

```
/**
 * Displays text sent over the serial port (e.g. from the Serial
Monitor) on
 * an attached LCD.
 */
#include
#include

// Set the LCD address to 0x27 for a 16 chars and 2 line display
LiquidCrystal_I2C lcd(0x27, 20, 4);


void setup()
{
   lcd.begin();
   lcd.backlight();

   // Initialize the serial port at a speed of 9600 baud
   Serial.begin(9600);
 lcd.setCursor(0,0); lcd.print("linje 1");
 lcd.setCursor(0,1); lcd.print("linje 2");
 lcd.setCursor(0,2); lcd.print("linje 3");
 lcd.setCursor(0,3); lcd.print("linje 4");
}

void loop()
{
   // If characters arrived over the serial port...
   if (Serial.available()) {
      // Wait a bit for the entire message to arrive
      delay(100);
      // Clear the screen
      lcd.clear();
```

```
        // Write all characters received with the serial port to the
LCD.
        while (Serial.available() > 0) {
            lcd.write(Serial.read());
        }
    }
}
```

Produktgalleri

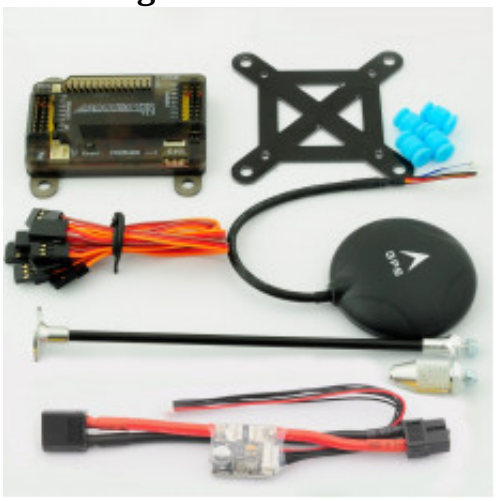












PhiShine
204A


*****EASTRISING*****
<20X4-CHARACTER-LCD>
/WWW.BUYDISPLAY.COM/
ERM2004-2-SERIES