
HC-05 Transceiver Module Arduino

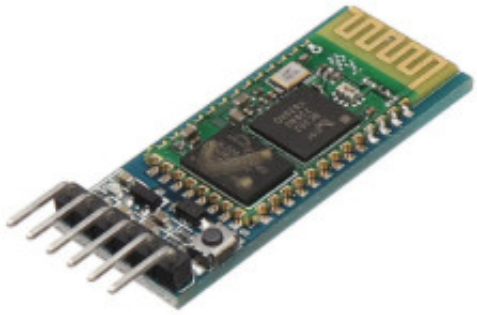

Produktkode: 154aa
Tilgjengelighet: 4
Weight: 20.00g
Custom Field 5 (Location): X3

Pris: kr. 65,00

Kort beskrivelse
HC-05 Bluetooth Modul Master-Slave Transceiver Module Arduino HC05

Beskrivelse
Specification:

Note:It's HC-05,Slave and master two in one module

this module can be set to a transmitter or receiver, transmitter could pairing with receiver , receiver and receiver or transmitter and transmitter can't communication between, receiver could pairing with computers and cell phone bluetooth , when buying, the default for receiver.

1. It is HC-05.


2. Use the CSR mainstream bluetooth chip, bluetooth V2.0 protocol standards.
3. Module working voltage 3.3 V.
4. Potter default rate of 9600, the user can be set up.
5. The core module size : 28 mm x 15 mm x 2.35 mm.
6. Working current: matching for 30 MA, matching the communication for 8 MA.
7. Dormancy current: no dormancy.
8. Used for GPS navigation system, water and electricity gas meter reading system.
9. With computer and bluetooth bluetooth adapter, PDA, seamless connection equipment .


Package Included:


- 1PCS*30ft Wireless Bluetooth RF Transceiver Module serial RS232 TTL HC-05 for arduino

Pinout



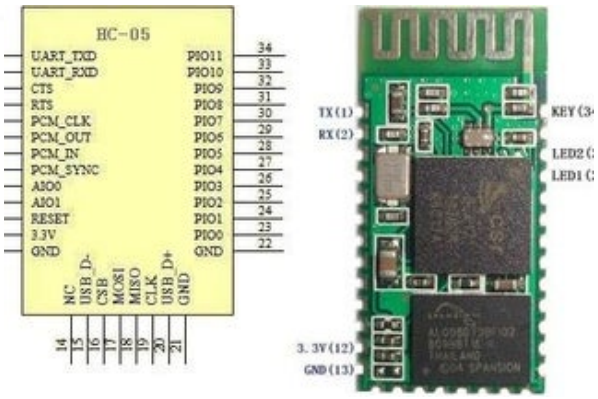

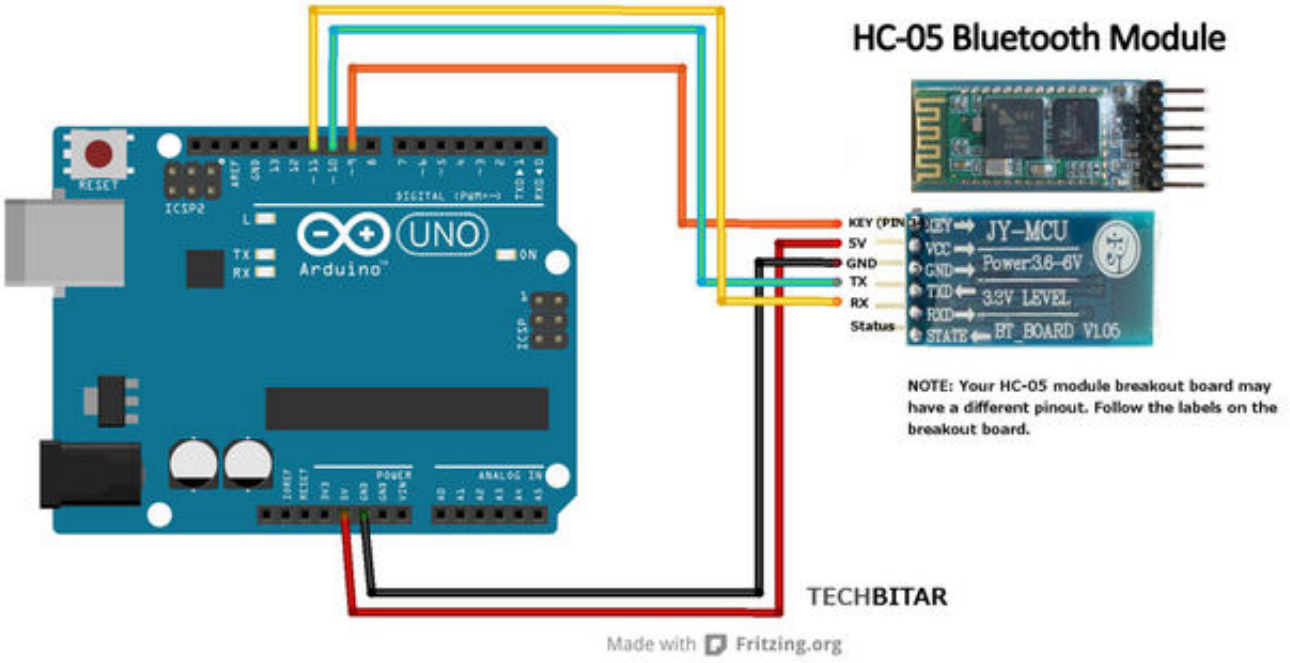
HC-05 Bluetooth Module
KEY (PIN
5V
GND
TX
RX
Status
JY-MCU
Power:3.6-6V
3.3V LEVEL
BT_BOARD V1.05
NOTE: Your HC-05 module breakout board may have a different pinout. Follow the labels on the breakout board.
TECHBITAR
Made with Fritzing.org

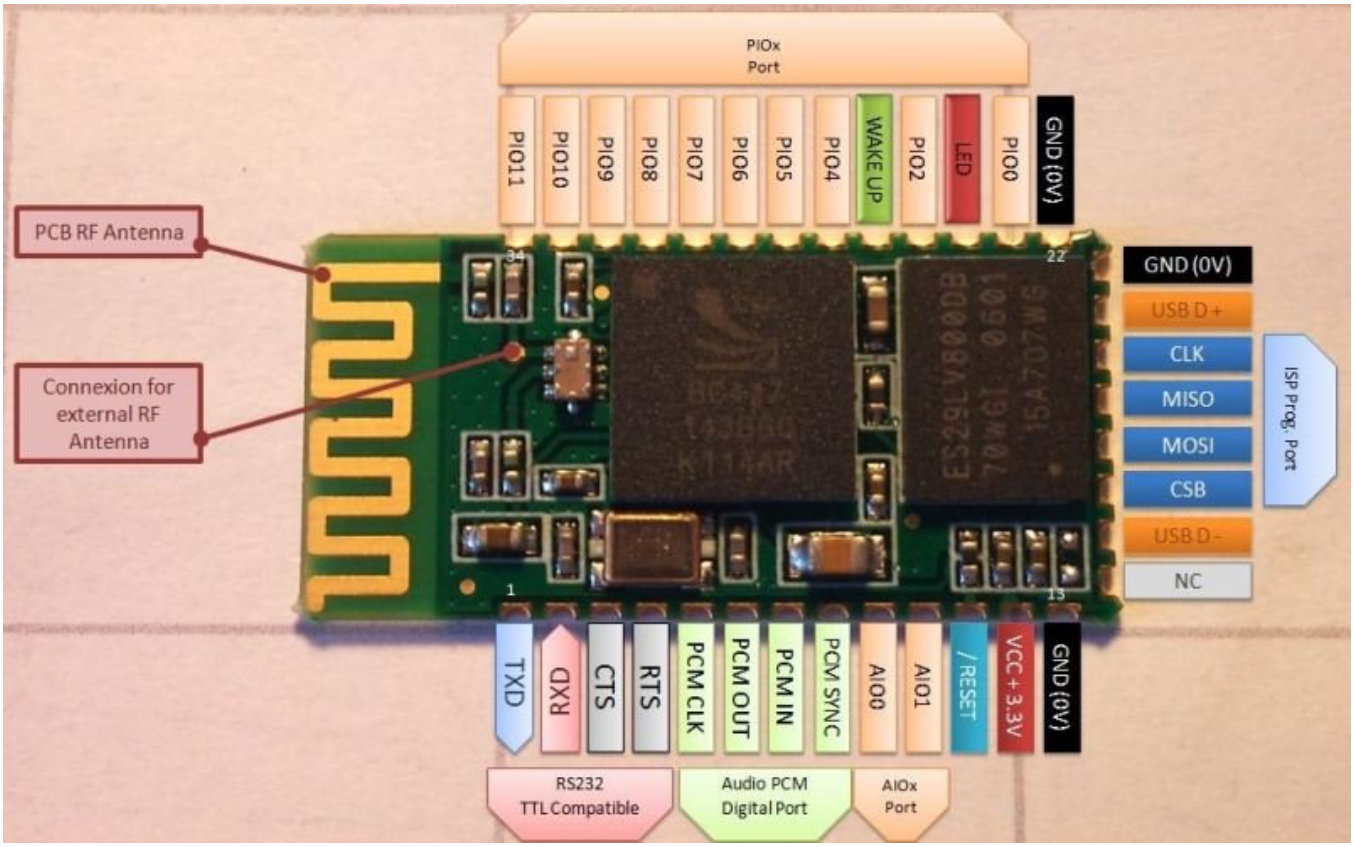
PIOx Port
PIO11
PIO10
PIO9
PIO8
PIO7
PIO6
PIO5
PIO4
WAKE UP
PIO2
LED
PIO0
GND (0V)
PCB RF Antenna
Connexion for external RF Antenna
34
22
1
13
GND (0V)
USB D+
CLK
MISO
MOSI
CSB
USB D-
NC
ISP Prog. Port
TXD
RXD
CTS
RTS
PCM CLK
PCM OUT
PCM IN
PCM SYNC
AIO0
AIO1
/ RESET
VCC + 3.3V
GND (0V)
RS232 TTL Compatible
Audio PCM Digital Port
AIOx Port