

USB 3.1 Connector Type-C 2Pin 2 Welding Wire Female



Product Code: 810aa

Stock: 10




Price: kr. 35,00

Short Description

USB 3.1 Connector Type-C 2Pin 2 Welding Wire Female Waterproof Female Socket With Screw Hole Rubber Ring Fast Charging Port

Description

TYPE-C 2P

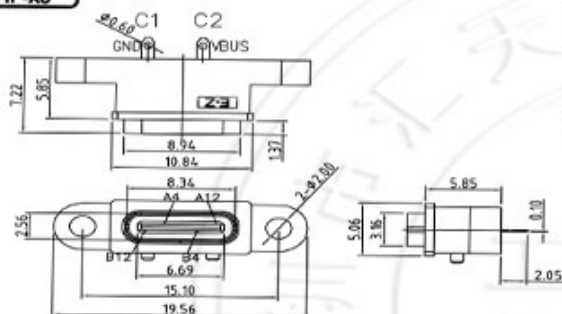

INTERFACE(FRONT VIEW)


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			WR5								
QND								WR5			QND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

FIN NO.	A12&H12	A4&H4
SIGNAL NAME	GND	VDD5
PCB PAD NO.	C1	C2

电子线焊接

电子线焊接

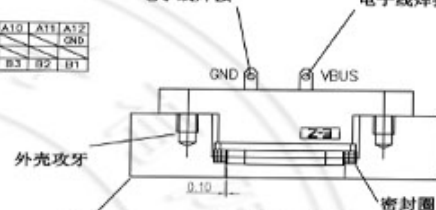

使用参考说明图

无需PCB板,可直接焊线

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100V
3. TEMPERATURE RANGE: -30 °C ~ 85 °
4. CONTACT RESISTANCE: 40 MILLIONHM
5. INSULATION RESISTANCE: 100 MEGOHM
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

5	Shell2	1	SUS304 Ni Plating T=0.20mm	N40-150u" / N40-150u" /	X. ± 0.50 X' ± 0" X ± 0.30 X' ± 1" XX ± 0.10 XXX' ± 0.5" XXX ± 0.05	UNITS	PART NO.	TITLE: 2PIN XXXX TYPE
4	Shell1	1	SUS304 Ni Plating T=0.3mm	N40-150u" / N40-150u" /		MATL		
3	Housing2	1	LCF(C.F30X)					
2	Contact	4	Phosphor bronze CSQ10R-EH Au/Ni Plating T=0.20mm	N40-150u" / Au CONTACT AREA=30 OTHER AREA=7	FINISH Q'TY	APPD: RADEN	3WG NO:	 SCALE 1/1
1	Housing	1	PAST (G.F30X)			CHKD: MARC		
ITEM	PARTNAME	Q'TY	FINISH	NOTE		DR: mly 2021/02/02		